

1500 Twin Units Switches and Indicators 16A 250Vac



- ▶ Twin unit rocker switch
- ▶ Choice of switching circuits including 3 position
- ▶ Push-on, solder and PCB terminals
- ▶ Choice of bezel styles
- ▶ Choice panel cut outs
- ▶ Matching indicator
- ▶ Single pole
- ▶ Splashproof option
- ▶ Bezel size 'A' style 30.2 x 25.0



16(4)A 250Vac T125



UL CSA 16A 250Vac
 UL CSA (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp
 UL 85°C, file E45221, CSA file LR10990

In house test

Inrush 36A to EN61058-1 & 20A 28Vdc

For versions with High Inrush or for 50,000 operations, see pages 20 and 26.



RoHS compliant

3mm contact gap except where marked μ .
 Technical data on pages 4 & 5 (switches), 66 (indicators).
 For twin units repeat the order details for both the left and right sides.

NON-LIT		LIT*	
B BLACK	B BLACK	A AMBER	X ROCKER COLOR R,G
R RED	R RED	C CLEAR	2 125V NEON* *Indicator only
W WHITE	W WHITE	G GREEN	3 250V NEON*
		R RED	7 12V INCANDESCENT*


C 1500/1500 A L B R 2 602AW

ORDER FORMAT

TERMINAL CODE FUNCTION CODE ROCKER CODE BODY CODE BODY COLOR ROCKER COLOR LAMP VOLTAGE OR "ON LIGHT" LEGEND & OPTIONS

TERMINAL	FUNCTION	ROCKER
C 6.3 x 0.8 9.1	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 1 or 4 	A Softline (Matt)
H 4.8 x 0.8 9.1	1500 ON - OFF 	B Softline splashproof (Matt)
K 2.8 x 0.8 9.1 2.0 1.2	1510 μ <small>HP rating N/A</small> ON - ON 	W Curved splashproof (Matt)
T Solder 0.21 7.0	1520 μ <small>125V & 250V 1/2 HP H terminal rated T100 only</small> ON - OFF - ON 	X Two colour (Matt) (not momentary) ON - OFF only
X PCB 0.8Sq 9.1 4.0	0430 <small>X terminal N/A</small> Indicator Technical data on page 66 	A Softline lens (Matt) (Indicator)


Enhanced Splashproofing

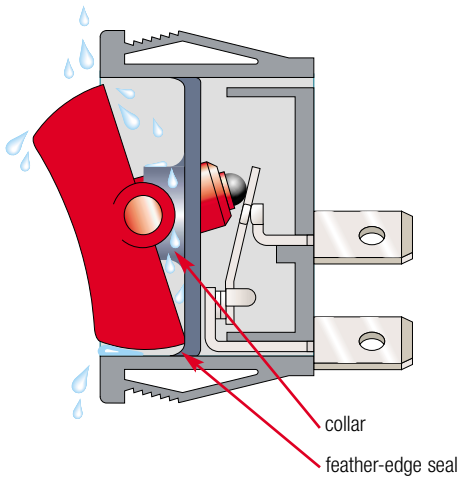







1500 W and B splashproof options

Feather edge seals and a close fitting collar protect current carrying parts from moisture.

B option has Hytel collar/seals for enhanced protection.



BODY

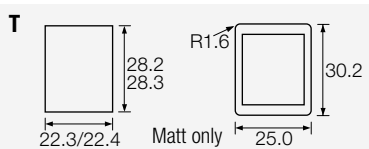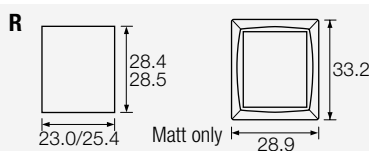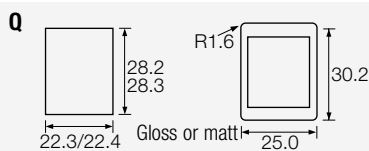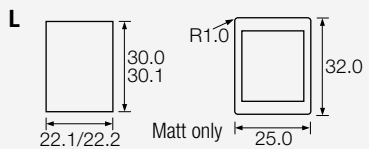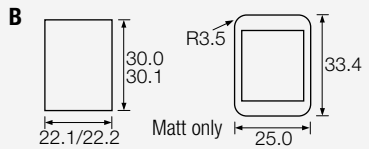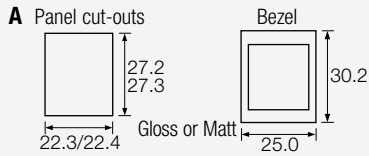

Cut-outs must be punched in the direction of insertion

OPTIONS

Finish Matt is standard


Color Call factory for custom colors
A full range is available for large orders

Legend printing Call factory for custom legends. State if a legend is to appear on the right or left hand unit (viewed from the front)

Lamp voltage Call factory for details

For all options call the factory

DIMENSIONS (mm)



Call the factory for terminal spacing details

Panel thickness

A,Q 0.75 to 3.3mm
L,B,T 0.75 to 2.5mm
R 0.75 to 3.0mm

Twin unit terminal numbering

The first 6 digits of the catalogue number refer to the left hand unit when looking at the front. (This has terminal nos. 4, 5 & 6).

Examples of our range of legend printing

() is legend color B-Black, W-White, R-Red



602A(W)



1091(W)