

04102 Push Button Switches 16(4)A 250Vac



16(4)A 250Vac T85 (10,000 operations)

Snap action normally open or closed switching.
Large overtravel allows actuator / button tolerance.
Button shape allows operation by hinged actuators.

RoHS

RoHS compliant

μ contact gap.
UL94 V1 Button and body.
Complies with UL Glow wire test - 850°C Cat D.

Additional technical data on pages 4 & 5.

- ▶ Positive snap action
- ▶ Rating 16A, 250V ac
- ▶ Long overtravel
- ▶ Momentary on and momentary off



04102-001


04102-001

ORDER FORMAT

TERMINAL FUNCTION ACTUATOR BODY

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY
<p>6.3 x 0.8</p>	<p>04102-001</p> <p>Single Pole ON-OFF (momentary ON)</p>	<p>(Off) 15.0 (Mom On) 12.4 (Full Travel) 8.0</p>	<p>2 Hole fixing</p> <p>Ø4.5 22.0</p> <p>(shakeproof washers not to be used with fixings)</p>
<p>6.3 x 0.8</p>	<p>04102-001R</p> <p>Single Pole ON-OFF (momentary OFF)</p>	<p>(On) 15.2 (Mom Off) 13.0 (Full Travel) 8.2</p>	<p>(shakeproof washers not to be used with fixings)</p>

Dimensions (mm)
04102-001

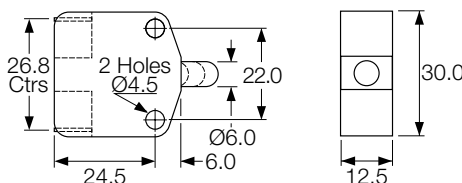

04102-001R

