

0055 Door Switches



C0055RB ---



C0056RB ---

- ▶ Door switches
- ▶ Ratings up to 2A, 250V ac
- ▶ High temperature rating up to 125°C
- ▶ Long overtravel
- ▶ Push button door switch



0055 & 0056
2(0.2)A 250Vac 25T125 5E4
(50,000 operations)



RoHS compliant

μ contact gap

Technical data on pages 4 & 5




C0055RB ---




C0056RB ---

ORDER FORMAT

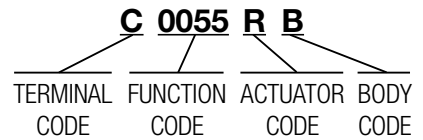

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS				
<p>C</p> <p>6.3 x 0.8</p> <p>9.1</p>	<p>0055</p> <p>ON - OFF (momentary OFF)</p>	<p>R</p>	<p>B</p> <p>Panel cut-out</p> <p>Panel thickness</p> <table border="1"> <tr> <td>0055</td> <td>1.0 - 1.6</td> </tr> <tr> <td>0056</td> <td>1.0 - 2.6</td> </tr> </table> <p>Flange</p>	0055	1.0 - 1.6	0056	1.0 - 2.6	<p>Finish</p> <p>Gloss finish only</p> <p>Color</p> <p>White is standard</p> <p>Call factory for custom colors</p>
0055	1.0 - 1.6							
0056	1.0 - 2.6							
<p>H (0056 only)</p> <p>4.8 x 0.8</p> <p>9.1</p>	<p>0056</p> <p>ON - OFF (momentary OFF)</p>							

Dimensions (mm)
C0055RB



C0056RB

