


Neon & LED Indicator Lights Sealed to IP52 and IP54

▶ **ORDER FORMAT example**



- ▶ IP52 and IP54 sealing
- ▶ Three bezel sizes: 18.0, 20.5 and 30.0 dia.
- ▶ Neon or LED indicator
- ▶ Black and satin chrome bezel or without bezel
- ▶ Recessed screw terminals

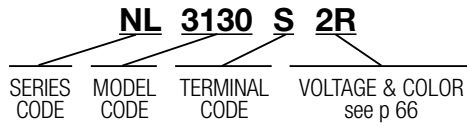

Approval shown for neon versions only



RoHS compliant


Neon versions feature integral current limiting & ghost lighting resistors.

LED versions have rectifier diodes & resistors for direct connection to 28Vac/dc.

IP52 is standard.

A panel sealing washer is available for IP54

SERIES	MODEL	TERM	VOLTAGE & COLOR see p66	SEALING OPTION State IP52 or IP54
LE LED	3130 No bezel	S	13.2	
NL Neon		Recessed Screw	8.0max	
			120°C neon 50°C LED	
LE LED	3160 Black bezel	S	16.2	
NL Neon		Recessed Screw	5.0max	
			120°C neon 50°C LED	
LE LED	3161 Satin chrome style bezel	S	16.2	
NL Neon		Recessed Screw	5.0max	
			55°C neon 50°C LED	
LE LED	3221 Large black bezel	S	22.3	
NL Neon		Recessed Screw	4.5max	
			120°C neon 50°C LED	

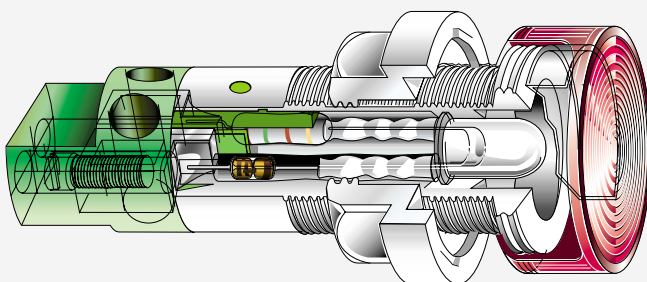

Select the version most suitable for your application from the 4 types shown.
Or call the factory for availability to your special requirements.