Fuseholders *5 x 20 mm*

- 5 x 20mm fuses
- Finger and tool release
- PC2 protection category
- Solder & 2.8mm terminals
- Proud & low profile bezels
- Snap to panel and screw fixing

6.3A 250Vac (max fuse rating*) T-55 to T+70 (ambient)
Maximum dissipation wattage: 1.5W

6.3A UL 94V2 UL file E92075 CSA file LR44770

RoHS compliant

These products comply with safety category PC2.
*Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

These fuseholders are fitted with combination (solder / 2.8) mid-body terminals. It has not been possible to show both views here.

ORDER FORMAT

T 0332 RA M520

TERMINAL CODE | BODY & CAP CODE | PANEL HOLE CODE | OPTIONS

M520
Terminal Cover

A0033 00
In-line 5 x 20 fuseholder
Call factory for rating details

TERMINAL

T



Solder

B



2.8 x 0.5

BODY AND CAP

0332
Finger release

0333
Tool release

0340
Tool release

0341
Tool release

PANEL HOLE

RA



RD



DIMENSIONS (mm)

0332 (T terminal shown)



Panel thickness 0.8-4.5mm

0333 (T terminal shown)



Panel thickness 0.8-4.5mm

0340 (T terminal shown)

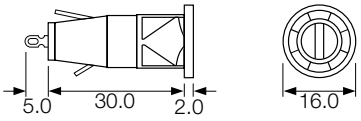

Panel thickness 0.8-2.0mm

0341 (T terminal shown)

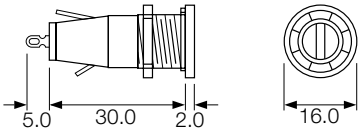

Panel thickness 0.8-4.5mm

ARCOLECTRIC CORPORATION 31-315 Plantation Drive, Thousand Palms, CA 92276 Tel: 760-343-3650 Fax: 760-343-3651 email: info@arcolectric.com