


IEC Connectors & NEMA Receptacles



- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ Fused and non fused
- ▶ Flange and snap to panel fixing

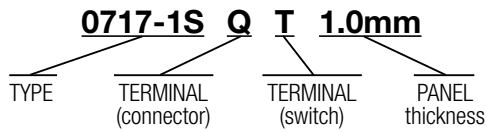

10A 250V ac



UL CSA 10A 250V ac UL 65°C



RoHS compliant


To order:
State type number, connector terminal code, switch terminal code (if applicable), and for snap-in items, the panel thickness. Stocked items are for 1.0mm panels.

ORDER FORMAT

TYPE	TERMINAL
0717-1-P Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab
0717-1S State "Non Lit" Switched Fused Inlet 5x20	Q 4.8 Solder Connector T 4.8 Solder Switch
0717-1S State "Lit" Switched Fused Inlet 5x20	Q 4.8 Solder Connector T 4.8 Solder Switch
0717-C Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab
0717-2-C Double Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab
0717-2-P Double Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab

DIMENSIONS (mm)


View below is at Y

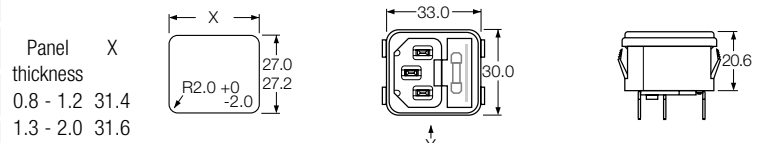

10A 250Vac

DP non-illuminated switch is standard


Panel thickness:
0.8 or 1.0 or 1.2
Call factory for details

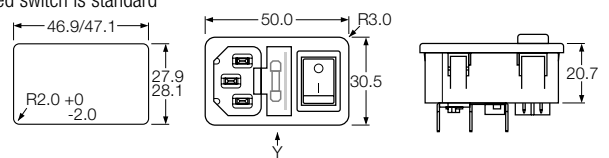


10A 250Vac

DP illuminated switch is standard

Panel thickness:
0.8 or 1.0 or 1.2
Call factory for details

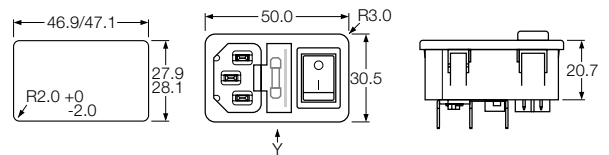


10A 250Vac




10A 250Vac

0717-2-C For applications (eg medical equipment) where both live & neutral feeds must be fused

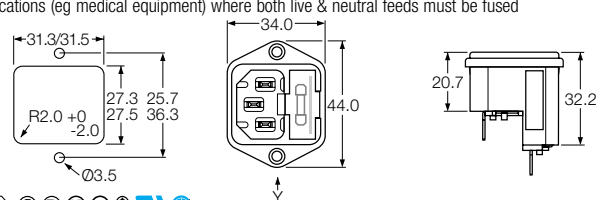





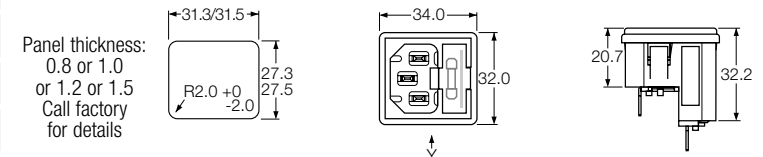



10A 250Vac

0717-2-P For applications (eg medical equipment) where both live & neutral feeds must be fused




10A 250Vac

TYPE	TERMINAL
0721-P  Inlet	S Solder 
0722-C  Inlet	Q 4.8 Solder  W 6.3 Tab 
0723-C  Outlet	Q 4.8 Solder  W 6.3 Tab 

DIMENSIONS (mm)

View below is at Y

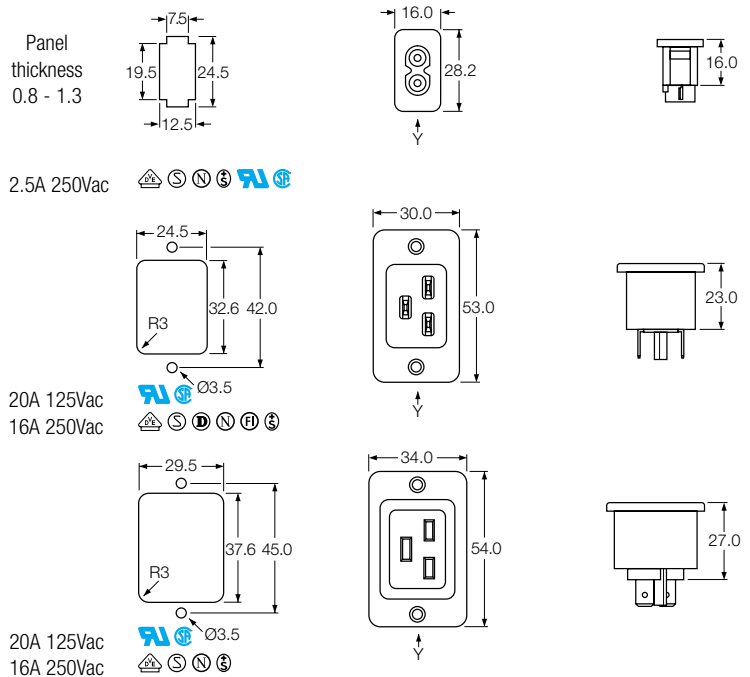













Technical data

Mouldings V2 (VO option)
 Connectors Tin plated solid brass
 Terminals Silver plated

Terminal dimensions

For Connectors

For Switches

For Connectors								For Switches			
S	N	Q	W	P	L	LS	V12	V16	Slide T	Slide K	Rocker T
2.5mm Solder	4mm Solder	4.8mm Solder/ Fast on	6.3 Fast on	PCB	Solder	2.8mm Solder	12-14 AWG Solid Wire	16 AWG Solid Wire	Solder	2.8mm Solder	4.8mm Solder
											
1.5x2.5 4.5	2.0x3.2 5.5	2.8x3.3 6.5	Ø1.7 8.0	1.7x3.0 5.5	Ø3.0x6.0	1.5x3.0 10.0	1.35	0.8	2.5 6.0 1.6	2.5 7.0 1.3	R1.0 R0.8 3.5 8.5

Note: Designated solder terminals should not be fitted with "Push on", "QD" or "Fast on" type cable connectors