



8620 & 8670 Rocker Switches - 3 Positions 10A 250Vac

rocker switches

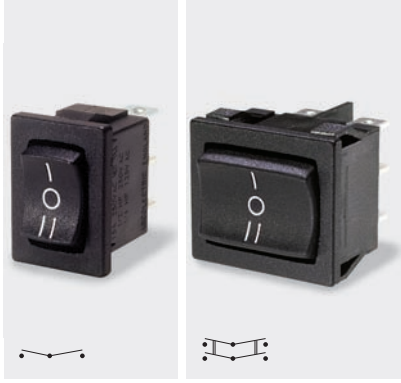

- ▶ 3 position miniature rocker switch
- ▶ Ratings up to 15A, 250Vac
- ▶ Single & double pole
- ▶ Center off switching
- ▶ 187 TAB, solder and PCB terminals
- ▶ Matching indicators
- ▶ Panel cut out:
single: 19.3 x 12.9
double: 19.3 x 21.9



10(4)A 250Vac T90




- UL CSA 15A 277Vac (Single pole)
- UL CSA 250Vac 1/2hp (Single pole)
- UL CSA 125Vac 1/4hp (Single pole)
- UL CSA 10A 277Vac (Double pole)
- UL CSA 277Vac 1/2hp (Single & Double pole)
- UL 90°C, file E45221, CSA file LR10990



RoHS compliant

μ contact gap.
Technical data on pages 4 & 5.


ORDER FORMAT

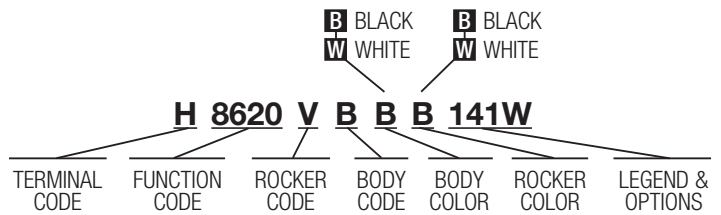


TERMINAL	FUNCTION	ROCKER	BODY	OPTIONS
H 4.8 x 0.8	 8620 ON - OFF - ON Single pole	V Curved 	B Single pole Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8	Finish Matt finish only. Color Call factory for custom colors. A full range is available for large orders. Legend printing Select from the examples or call factory for custom legends. Protective covers IP65 L167 for SP L180 for DP (designed to IP65) Snaps on to body, this reduces maximum acceptable panel thickness to 2.2mm.
T Solder	 8670 ON - OFF - ON Double pole	H Slotted for actuator (8620 only) 	B Double pole Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 Dim X 19.1/19.2 19.3/19.4 19.7/19.8	
X PCB 0.8sq Double pole switches with X terminals are supplied without terminal barriers			Cut-outs must be punched in the direction of insertion	

Dimensions (mm)

8620VB (H terminals shown)



8670VB (H terminals shown)



8670VB (X terminals shown)

