

0305 Combined Switch / Lampholder for Freezers



2A 250Vac 25 T 85 (0305 only)




UL 15W 125/250Vac (0305 only)
UL 65°C, file E116391 (0305 only)



RoHS compliant

Switched units have μ contact gap.
Technical data on pages 4 & 5.


- ▶ E12 (12mm or candelabra) and E14 (14mm or SES) lamps
- ▶ Switch rating up to 2A, 250V ac
- ▶ Auto switching
- ▶ Mercury free
- ▶ Available with right or left hand orientation
- ▶ Available as lampholder only

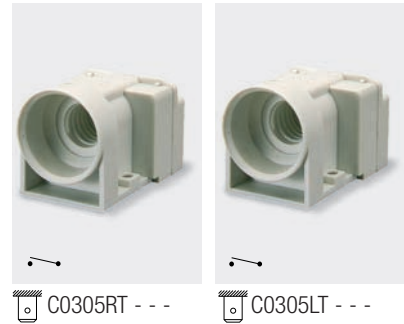

C0305RT - - -

C0305LT - - -


ORDER FORMAT



▶ TERMINAL	▶ FUNCTION	▶ MOUNTING	▶ BODY	▶ OPTIONS
<p>C</p> <p>6.3 x 0.8</p>	<p>0305 (E14)</p> <p>ON - OFF Switch and Lampholder</p> <p>0306 (E12)</p> <p>ON - OFF Switch and Lampholder</p>	<p>L</p> <p>For Left hinged lid for 0305/0306 switches, not for 0307 lampholder</p> <p>25° min</p> <p>View from bulb end</p> <p>R</p> <p>For Right hinged lid for 0307 lampholder or 0305/0306 switches</p> <p>25° min</p> <p>View from bulb end</p>	<p>T</p> <p>Body without flange for 0305/0306 switches</p> <p>Top view</p> <p>S</p> <p>Body with rear flange for 0307 lampholder and for 0305/0306 switches</p> <p>Top view</p>	<p>Color</p> <p>Call factory for colors. A full range is available for large orders.</p>
<p>H</p> <p>4.8 x 0.8</p>	<p>0307 (E14)</p> <p>Lampholder only (No Switch)</p>			

Dimensions (mm) and Properties

The mechanism of this switch/lampholder does not contain mercury and may be safely used in food storage equipment. When fitted to the lid of a freezer storage cabinet, the switch will operate the lamp when the lid is opened to the angle of tilt shown in the drawing.

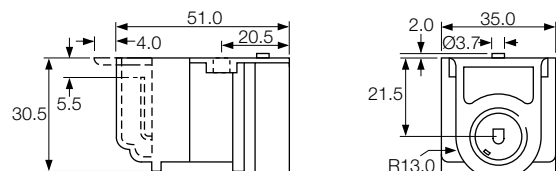

0055 Door Switches



C0055RB ---



C0056RB ---

- ▶ Ratings up to 2A, 250V ac
- ▶ High temperature rating up to 125°C
- ▶ Long overtravel
- ▶ Choice of terminal orientation



0055 & 0056
0.2(0.2)A 250Vac 25T125 5E4
(50,000 operations)



RoHS compliant

μ contact gap

Technical data on pages 4 & 5




C0055RB ---




C0056RB ---

ORDER FORMAT

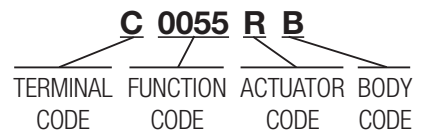


TERMINAL	FUNCTION	ACTUATOR	BODY	OPTIONS				
C <p>6.3 x 0.8</p>	0055 <p>ON - OFF (momentary OFF) 90° terminals</p>	R 	B Panel cut-out <p>Panel thickness</p> <table border="0"> <tr> <td>0055</td> <td>1.0 - 1.6</td> </tr> <tr> <td>0056</td> <td>1.0 - 2.6</td> </tr> </table> Flange 	0055	1.0 - 1.6	0056	1.0 - 2.6	Finish Gloss finish only Color White is standard Call factory for custom colors
0055	1.0 - 1.6							
0056	1.0 - 2.6							
H (0056 only) <p>4.8 x 0.8</p>	0056 <p>ON - OFF (momentary OFF) Straight terminals</p>							

Dimensions (mm)
C0055RB



C0056RB



3005 Refrigerator Door Switches Splashproof



3005 25W 25T85 5E4 (50,000 Operations) 250Vac
3006 65W 25T85 5E4 (50,000 Operations) 250Vac



UL 0.3A 250Vac
UL 0.2A 125Vac



RoHS compliant

These products require 3mm minimum actuator stroke to ensure switch action and rating above.

μ contact gap.
Technical data on pages 4 & 5.


- ▶ Door switches
- ▶ Momentary on and momentary off switching
- ▶ Splash Resistant
- ▶ Choice of terminal orientation
- ▶ Choice of actuators










C3005CB



C3005BL




ORDER FORMAT


▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BEZEL / TERM ORIENTATION	▶ OPTIONS
C  6.3 x 0.8	3005  ON - OFF (momentary OFF) 1mm max travel to OFF position	B  26.0	R L B  Terminal direction (viewed from hinge end) Panel cut-out: 12.1/12.2 x 25.4/25.5 Bezel: 14.0 x 30.2 Bezel Profile: 5.0	Finish Gloss finish only Color White is standard Call factory for custom colors A full range is available for large orders
H  4.8 x 0.8	3006  ON - OFF (momentary ON) 3mm min travel to ON position	C  13.0		

Dimensions (mm) (C terminals shown)

3005

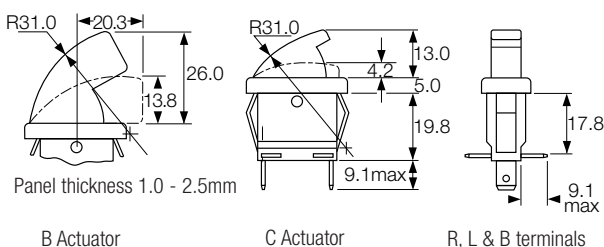

3006

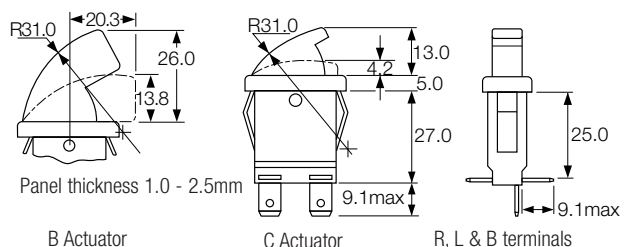

3100 Refrigerator Door Switches Splashproof



E3102AA



E3111BA

- ▶ Door switches
- ▶ Ratings up to 5A, 250V ac
- ▶ Splash Resistant
- ▶ Changeover, momentary ON and momentary OFF
- ▶ Choice of actuators



5A 250Vac 25T85 5E4 (50,000 Operations)



UL CSA 5A 250Vac
UL 85°C, file E45221, CSA file LR10990


In house test

200W 250Vac Lampload (1,000,000 operations)



RoHS compliant

μ contact gap.
Technical data on pages 4 & 5.
Sealed terminals option available. Call sales for details.




ORDER FORMAT

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<p>E</p> <p>4.8 x 0.5</p> <p>For sealed terminals call sales</p>	<p>3101</p> <p>ON - OFF (momentary ON)</p> <p>3102</p> <p>ON - OFF (momentary OFF)</p> <p>3111</p> <p>ON - ON (momentary 1 side)</p>	<p>A</p> <p>17.6 max</p> <p>B</p> <p>15.6 max</p> <p>C</p> <p>23.0 max</p> <p>D</p> <p>17.1 max</p>	<p>A</p> <p>Panel cut-out Panel thickness 1.0 - 2.5mm</p>	<p>Finish Gloss finish only</p> <p>Color White is standard</p> <p>Call factory for custom colors A full range is available for large orders</p>

Dimensions (mm) ("A" actuator shown)

- 3101** uses terminals 1,2
- 3102** uses terminals 1,2
- 3111** uses terminals 1,2,3

For details of actuator travel and switching angles call sales.

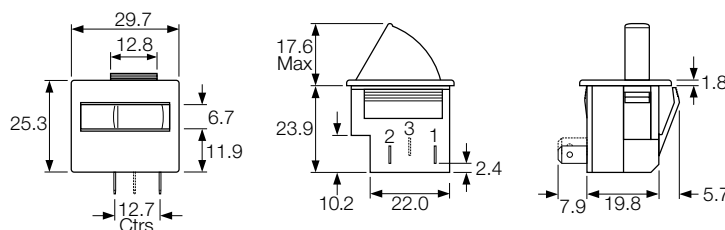

3140 Refrigerator Door Switches Splashproof



5A 250Vac 25T85 5E4 (50,000 Operations)



UL CSA 5A 250Vac
UL 85°C, file E45221, CSA file LR10990

In house test

24Vac & 110Vac Lampload (500,000 operations)



RoHS compliant

3141, μ contact gap.
3145 and 3146, 3mm contact gap.
Technical data on pages 4 & 5.
Sealed terminals option available. Call sales for details.


- ▶ Door switches
- ▶ Ratings up to 5A, 250V ac
- ▶ Splash Resistant
- ▶ Momentary action
- ▶ Choice of actuators
- ▶ 2 circuit switch



HK3141AA



H3145AA



ORDER FORMAT

TERMINAL	FUNCTION	ACTUATOR	BODY	OPTIONS
<p>H</p> <p>4.8 x 0.8</p> <p>Standard format is H terminals in positions 1 & 2 and K terminals in positions 3 & 4</p> <p>For sealed terminals call sales</p>	<p>3141</p> <p>ON - ON (momentary)</p> <p>3145</p> <p>ON - OFF (momentary OFF)</p> <p>3146</p> <p>ON - OFF (momentary ON)</p>	<p>A</p> <p>B</p> <p>C</p> <p>D</p>	<p>A</p> <p>Panel cut-out Panel thickness 1.0 - 2.5mm</p>	<p>Finish Gloss finish only</p> <p>Color White is standard</p> <p>Call factory for custom colors A full range is available for large orders</p>

Dimensions (mm) ("A" actuator shown)

3141 uses terminals 1,2,3,4

3145 uses terminals 3,4

3146 uses terminals 1,2

For details of actuator travel and switching angles call sales.

